Sortimo International GmbH
Dreilindenstrasse 5
86441 Zusmarshausen,
Germany
direct@sortimo.de

Sortimo®
Intelligente Mobilität

en - Assembly Instructions

12 V Handiwash Unit on the SR5

Ref. no.: 6000013897

Information on the document

Comply with the following aspects for the safe use of the product.

▶ Read this document carefully before use.

▶ Keep this document for subsequent reference.

▶ Pass this document on to the end user and the user of the vehicle.

This document forms an integral part of the product and is an important element of the safety concept. Failure to observe this can lead to serious damage to property, injury or even fatal injury.

Contact

Do you have questions about the product? You can find your personal contact on our website.

Intended use

The Handiwash Unit is used as a hand washing basin with cold and warm water.

Foreseeable misuse

⚠	**Caution!**

Damage to property and a risk of injury from damaged products.

Severe injuries can result from the use of damaged products.

▶ Do not use damaged products.

▶ Replace damaged products with new ones.

▶ Make sure that power lines are not damaged.

▶ Do not repair damaged products at your own discretion.

▶ Regularly replace the water.

▶ The water is not suitable for drinking!

Operator’s obligations

Ensure that ...

- The applicable laws and standards are observed (e.g. DGUV V38 and professional association guidelines).
- The safety labels are visible and legible on the product.
- The user has read and understood this document.
- The user has the required knowledge and can apply it.

© Sortimo International GmbH

Limitations of use

Danger!

Severe to fatal injuries can result if the maximum permitted loading weight is exceeded.

▶ Pay attention to the weight of your van racking system.

▶ When using, make sure that everything is held securely in place.

▶ Comply with all electrical regulations.

▶ Pay attention to the information in the handbook and in the vehicle documentation

- Maximum permissible axle load,
- Maximum permissible total weight.

Requirements for the user

Life phases	Knowledge
Fitting and dismantling the product	- Technical expertise
Working on the electrics	- Specialist electrical engineering knowledge - Applicable legislation and standards, e.g. VDE 0100-717
Securing of load	- The applicable legislation and standards governing the securing of loads, e.g. the German Road Traffic Act StVO and the German Regulation on the Approval of Road Vehicles StVZO.

Maintenance and care

Regularly check the products for wear or damage.

Use a moist cloth to clean the plastic, avoiding corrosive cleaning agents to prevent damage to the product. Regularly descale your product.

Technical details:

Power	12 V DC (120 watts)
LxWxH	520 x 300 x 230 mm
Weight	5.5 kg empty 14.0 kg full
Water capacity	8.5 litres 6.85 litres available
Water temperature	max. 60° Heating up time from 18° to 50° approx. 22 minutes

© Sortimo International GmbH

Note

ⓘ	**Information!**
Refer to the manufacturer's instructions for use included in the box for further information and electrical wiring details.	

Installation kit

1x 6000013897 12 V Handiwash Unit		
1x 1000018787 installation kit		
2x 2000016214 (2x 2000016155) (pre-assembled)	1x 6000013875 M5x20TX25	2x KU1000209
2x 6000003264 M6x30 8 Nm		

© Sortimo International GmbH

Installation

Remove the original “2 screws” on the rear as they are no longer needed.	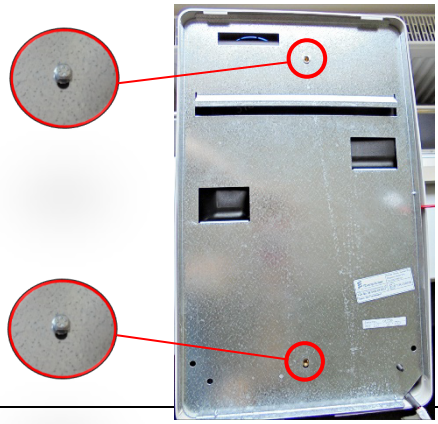
Rear of the Handiwash A / B - Thread for the retaining plate C - Recess	

© Sortimo International GmbH

“Attaching the top of the retaining plate”

The retaining plate is attached to the rear panel by a screw (M6x30) and spacer (upper slot).

The bracket (A) of the retaining plate is inserted into the recess (B) of the rear panel!

Push the retaining plate up as far as it will go (to the stop).

Tighten the screw to the specified torque.

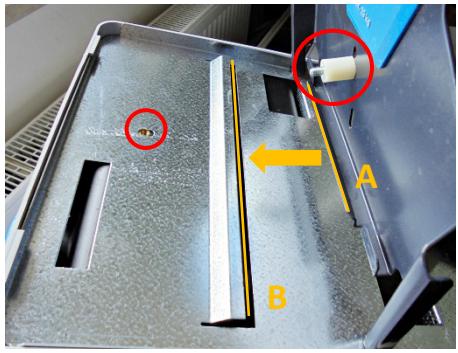

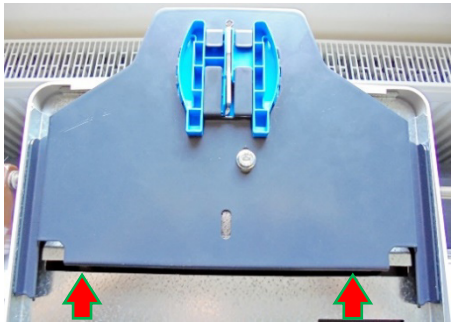

© Sortimo International GmbH

“Attaching the bottom of the retaining plate”

The retaining plate is attached to the rear panel by a screw (M6x30) and spacer (lower slot).

Push the retaining plate down as far as it will go (to the stop)!

Tighten the screw to the specified torque.

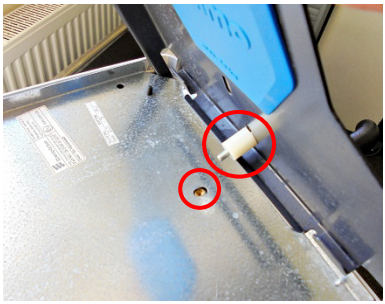

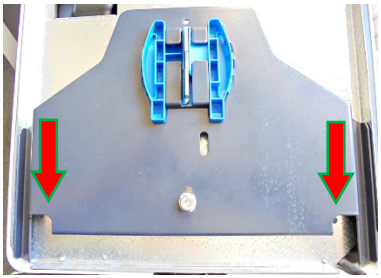

The retaining plate is now attached at the top and bottom.

© Sortimo International GmbH

Suspend the Handiwash on the SR5 at the required height.	
 Use a screw (M5x20TX25) to secure the retaining plate in place.	

© Sortimo International GmbH